



SHIPPENSBURG PUMP CO. INC.

P.O. BOX 279, SHIPPENSBURG, PA 17257

PH 717-532-7321 • FAX 717-532-7704

WWW.SHIPCOPUMPS.COM



Pride

Quality

Craftsmanship

BULLETIN 101

Revised 1/14

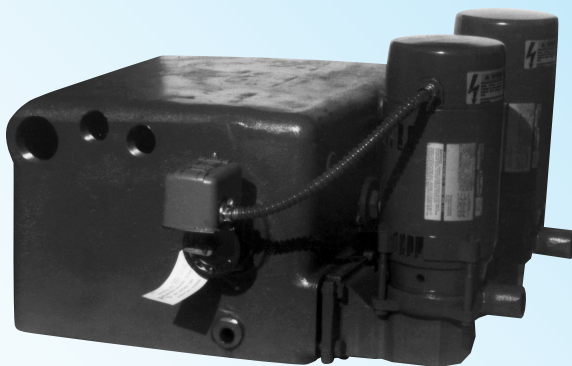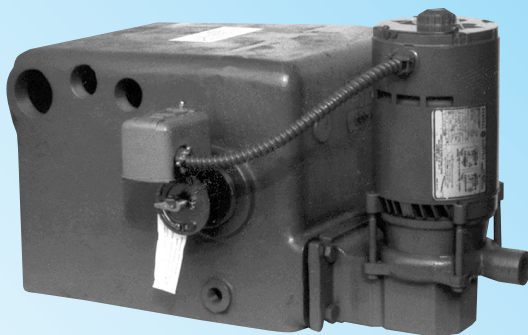

TYPE EC

ECONOMICAL CONDENSATE PUMPS

Motors have built-in thermal overload protection.

Centrifugal Pumps designed for many years of dependable service with low maintenance.

3500 RPM provides low inertia for intermittent operation.

Cast Iron Receiver provides years of service even with the most aggressive waters.

Float Switches with stainless steel float and rod provide optimum levels in the receiver for pump operation.


Unit is factory wired for 115 volts. Motor and float switch can be field wired for 230/1/60 operation.

Pump has no internal bearings. (Motor bearings refer to motor manufacturer's instructions.)

ODP Motors Only

SHIPCO[®] PUMPS are equipped with Mechanical Seals rated up to a standard 250°F.
Higher temperature seals and special faces available upon request.


TYPE EC SINGLE PHASE, 3500 RPM, O.D.P. ONLY							
PUMP GPM	PUMP PSIG	PUMP TYPE	PUMP HP	DISCH. SIZE INCHES	REC. SIZE	SIMPLEX CATALOG NUMBER	DUPLEX CATALOG NUMBER
9	20	110	1/3	3/4	6	60 EC	—
9	25	110	1/2	3/4	6	60 EC-25	—
9	30	106	1/2	3/4	6	60 EC-30	—
9	40	106	3/4	3/4	6	60 EC-40	—
12	20	110	1/3	3/4	10	80 EC	—
12	25	110	1/2	3/4	10	80 EC-25	—
12	30	106	1/2	3/4	10	80 EC-30	—
12	40	106	3/4	3/4	10	80 EC-40	—
15 or 18	20	110	1/3	3/4	15	120 EC	120 ECD
15	25	110	1/2	3/4	15	120 EC-25	120 ECD-25
15 or 18	30	106	1/2	3/4	15	120 EC-30	120 ECD-30
15 or 18	40	106	3/4	3/4	15	120 EC-40	120 ECD-40
18	20	110	1/3	3/4	25	150 EC	150 ECD
18	30	106	1/2	3/4	25	150 EC-30	150 ECD-30
18	40	106	3/4	3/4	25	150 EC-40	150 ECD-40
22-1/2	20	110	1/2	1	25	180 EC	180 ECD
22-1/2	30	106	3/4	1	25	180 EC-30	180 ECD-30

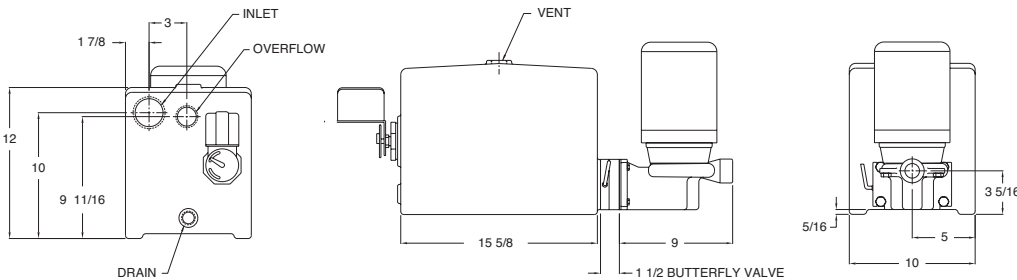


**6 GALLON
CAST IRON RECEIVER**
 INLET – 2" NPT
 OVERFLOW – 1 1/4" NPT
 VENT – 1" NPT
 DRAIN – 3/4" NPT

10 GALLON CAST IRON RECEIVER
 INLET – 2" NPT • OVERFLOW – 1 1/4" NPT
 VENT – 1 1/4" NPT • DRAIN – 1/2" NPT

NOTE: Inlet may be located 7" up from floor if specified.
 This will reduce the capacity of the receiver to 6 gallon.
This option must be noted on each order.

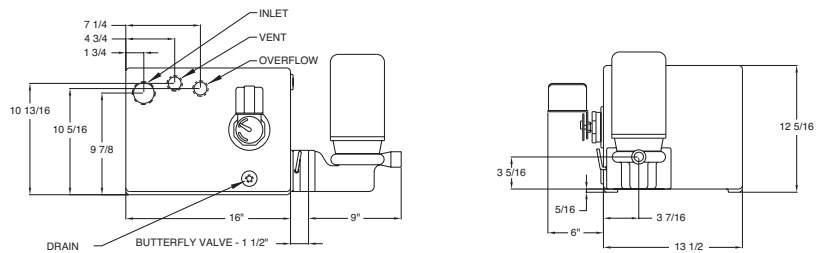

15 GALLON CAST IRON RECEIVER
 INLET – 2" NPT • OVERFLOW – 1 1/4" NPT
 VENT – 1 1/4" NPT • DRAIN – 1/2" NPT

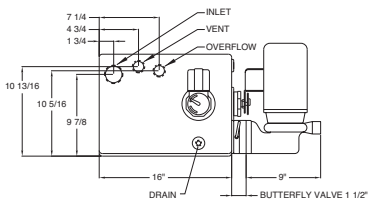

25 GALLON CAST IRON RECEIVER
 INLET – 2" NPT • OVERFLOW – 1 1/4" NPT
 VENT – 1 1/4" NPT • DRAIN – 1/2" NPT

